


VMC-L2017P/L2019P

Features

- More than 500 TV lines of horizontal resolution
- PAL or NTSC automatic detection
- 2 composite, S-video and 2 audio inputs A, B plus VGA input
- 1280 x 1024 resolution
- Multilingual menu support: English / French / German / Spanish / Italian / Russian / Swedish / Portuguese / Korean / Chinese / Japanese
- Picture-in-Picture (PIP) function
- 1000:1 high contrast ratio
- VESA 100 x 100 standard mounting bracket compatible
- Remote controller
- Over scan/under scan selectable

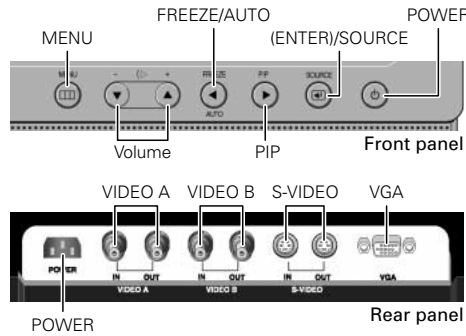


Specifications


Model No.	VMC-L2017P	VMC-L2019P
Display type	SXGA a-Si TFT LCD	
Color system	PAL/NTSC (Automatic detection)	
LCD display	17" active matrix TFT LCD panel	19" active matrix TFT LCD panel
Viewable size (H x V)	338 x 270 mm / 13.3 x 10.6 in. (4:3)	376 x 301 mm / 14.8 x 11.9 in. (4:3)
Pixel pitch (H x V)	0.264 x 0.264 mm / 0.01 x 0.01 in.	0.294 x 0.294 mm / 0.012 x 0.012 in.
Horizontal resolution	1280 x 1024, 500 TV lines or more (Y/C input mode)	
Viewing angle degree	Left/Right/Up/Down: 80°	
Scanning frequency	Horizontal: 31 kHz to 82 kHz, Vertical: 50 Hz to 77 Hz	
Contrast ratio	1000:1	
Brightness	300 cd/m ² / 359 cd/yd ²	
Response time Tr/Tf	1.3/3.7 m/sec.	
Display color	1,670 M	
Display monitor timing	VESA compatible (VGA mode)	
Display mode	Video A, Video B, S-Video, VGA	
Input connector	Video signal (BNC IN)	Composite sync signal, 1.0 V(p-p), 75 Ω BNC connector x 2
	S-Video signal (Y/C IN)	Separate Y/C signal, mini-DIN connector Y signal: 1.0 V(p-p), 75 Ω negative sync C signal: 0.286 V(p-p), 75 Ω negative sync
Audio signal (AUDIO IN)	6.0 dBs (400 mVrms), 2W (1W+1W) stereo, RCA pin x 2	
	VGA signal (VGA IN)	VGA monitor connector (15-pin) Red signal, Green signal, Blue signal: 0.7 V(p-p), 75 Ω, positive sync
Output connector	Video signal (BNC OUT)	Composite sync signal, 1.0 V(p-p), 75 Ω BNC connector x 2
	S-Video signal (Y/C OUT)	Separate Y/C signal, mini-DIN connector Y signal: 1.0 V(p-p), 75 Ω negative sync C signal: 0.286 V(p-p), 75 Ω negative sync
	Menu language	English / French / German / Spanish / Italian / Russian / Swedish / Portuguese / Korean / Chinese / Japanese
Power input	AC100 - 240 V/0.7 A	
Operating condition	Temperature: -10°C to +40°C/14°F to 104°F Humidity: 10% to 80% (non-condensation)	
Storage condition	Temperature: -20°C to +45°C/-4°F to +113°F Humidity: 5% to 95% (non-condensation)	
Power consumption	Approx. 42 W	
Weight	Approx. 6.0 kg (13.2 lbs.)	Approx. 6.9 kg (15.2 lbs.)

- All specifications and features are subject to change without notice.
- For complete information on product specifications and accessories, please contact your local SANYO supplier.

Accessories and Dimensions

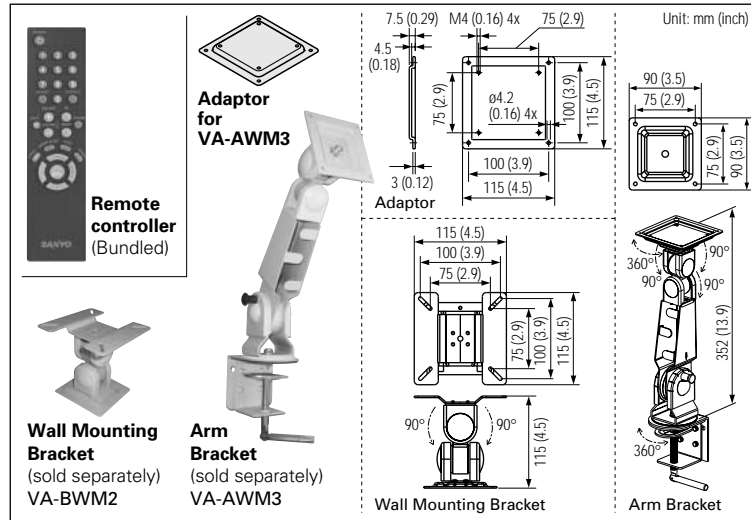

Dimensions and Angles

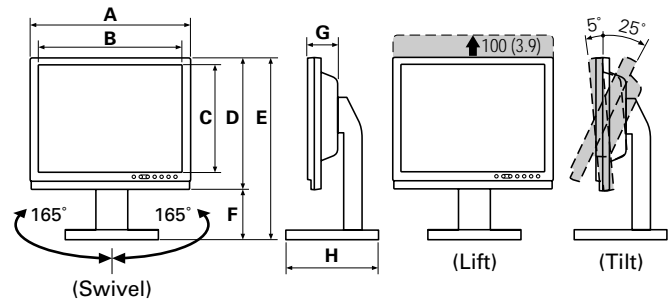

Model	A	B	C	D	E	F	G	H
VMC-L2017	371 (14.6)	339 (13.4)	272 (10.7)	331 (13.0)	368 (14.5)	37 (1.5)	67 (2.6)	220 (8.7)
VMC-L2019	412 (16.2)	378 (14.9)	303 (11.9)	361 (14.2)	398 (15.7)		69 (2.7)	

Unit: mm (inch)

Caution: Please consult the instruction manual to ensure safe and proper operation of the product.



DI Company of SANYO Electric Co., Ltd. obtained Quality Management System ISO 9001 and Environmental Management System ISO 14001 certifications.

Distributed by:



SANYO Electric Co., Ltd.
DI Company
<http://www.sanyosecurity.com>

©2008 SANYO Printed in Japan 2008.1 MA
SFA166F

Think GAIA
For Life and the Earth

SANYO

High Performance Professional LCD Monitors

VMC-L2017P PAL

VMC-L2019P PAL

- 17" or 19" active matrix TFT LCD panels
- 1280 x 1024 resolution
- 1000:1 high contrast ratio
- 2 composite inputs (Loopthrough out, BNC type)
- 1 VGA input and 1 S-VIDEO input
- 2 audio inputs (RCA type)
- Multi-language OSD (11 languages)
- Remote controller



VMC-L2017P